

Use and maintenance

Operating guidelines Clarke CA60 automatic scrubbers



1. Turn on the key and verify there is enough battery power to complete the work. Charge batteries as required.



2. Install the squeegee using the thumb nuts. Attach squeegee hose.



3. Remove the black cover on the front and fill to desired level. Machine holds 16 gallons/61 liters maximum.



4. Check the water level indicator on the right side of the machine. Add appropriate chemical.



5. Disc: Lift the brush/pad driver to engage the rush/pad holder and rotate clockwise as viewed from above. BOOST: Simply press the pad onto the pad driver face material.



6. Lower the brush deck by pushing on the pedal to the right and lift it up.



7. Press the OneTouch™ scrub button to enable scrubbing. The vacuum will start. Push on one of the two switches 1/2 second to install the brush. Brush will automatically install.



8. Use the squeegee raise/lower handle to lower the squeegee to the floor. Adjust the squeegee pitch as required.



9. Press left, right or both yellow palm switches to move the machine forward.



10. Use the rabbit/turtle knob to control the speed.



11. Pressing either yellow palm buttons and the white reverse button together will put the machine into reverse.



12. Press the + or - solution buttons to increase or decrease the water flow rate and to turn water off.



Push on the button

13. On disc machines, the brush/pad holder can be removed automatically. Raise the deck and press the click off brush button.

September 2018 - Copyright © Nilfisk Group 2018 - www.clarkeus.com

Nilfisk, Inc.
9435 Winnetka Avenue North
Brooklyn Park, MN 55445
Phone: 800.253.0367
Fax: 800.825.2753
www.clarkeus.com

Nilfisk Canada Co.
240 Superior Boulevard
Mississauga, Ontario, Canada L5T 2L2
Phone: 800.668.8400
Fax: 800.263.5111
www.nilfisk-advance.ca

Clarke
by Nilfisk

Maintenance

Operating guidelines Clarke CA60 automatic scrubbers



1. When scrubbing is complete, turn off the key and perform the following maintenance.



2. Daily: Empty the clean water tank using the solution tank drain hose and sight tube.



3. Daily: Empty the dirty water tank using the recovery water dump hose.



4. Daily: Inspect and rinse the ball float cage and the foam filter, debris catch cage and inspect and clean the gasket as required.




5. Daily: Remove the squeegee, and clean. Inspect the blades and flip them or replace them as required.




6. Weekly: Inspect the solution filter and clean as required.



7. Daily: Leave the recovery tank lid open after cleaning, to let the tank air.

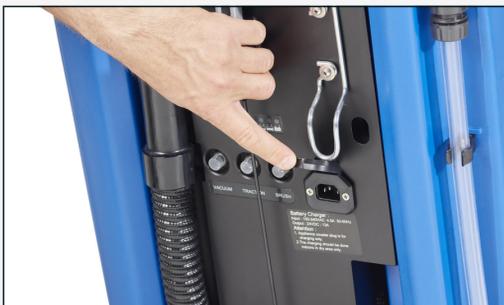

8. Daily: Charge the machine when not in use using the supplied AC cord and on-board charger receptacle.

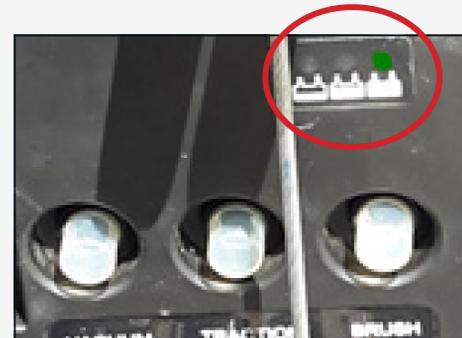

9. Daily: Charge the machine overnight and check the status using the battery status gauge.

Local Clarke dealer: _____

Phone number: _____

SN: _____

September 2018 - Copyright © Nilfisk Group 2018 - www.clarkeus.com

Nilfisk, Inc.
9435 Winnetka Avenue North
Brooklyn Park, MN 55445
Phone: 800.253.0367
Fax: 800.825.2753
www.clarkeus.com

Nilfisk Canada Co.
240 Superior Boulevard
Mississauga, Ontario, Canada L5T 2L2
Phone: 800.668.8400
Fax: 800.263.5111
www.nilfisk-advance.ca

Clarke[®]
by Nilfisk